1 GROUND
XLR : 2 + INPHASE
3 - RETURN

with unbalanced signals, ground terminal return connecting to terminal ground

+ inphase
ground
- return

+ inphase
ground
- return

ground
+VDC
(12-15 V)

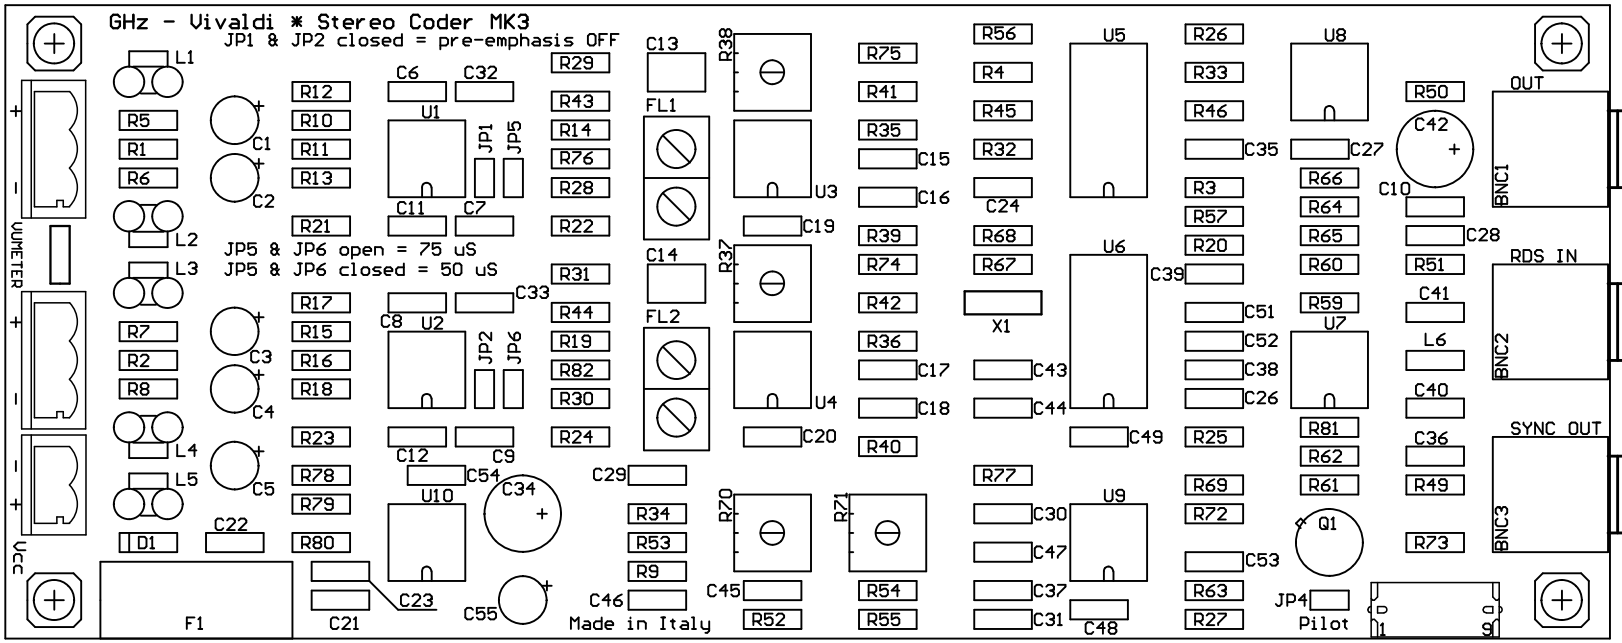

MPX OUT

RDS IN

19 KHz OUT

WWW.GHZ.IT